


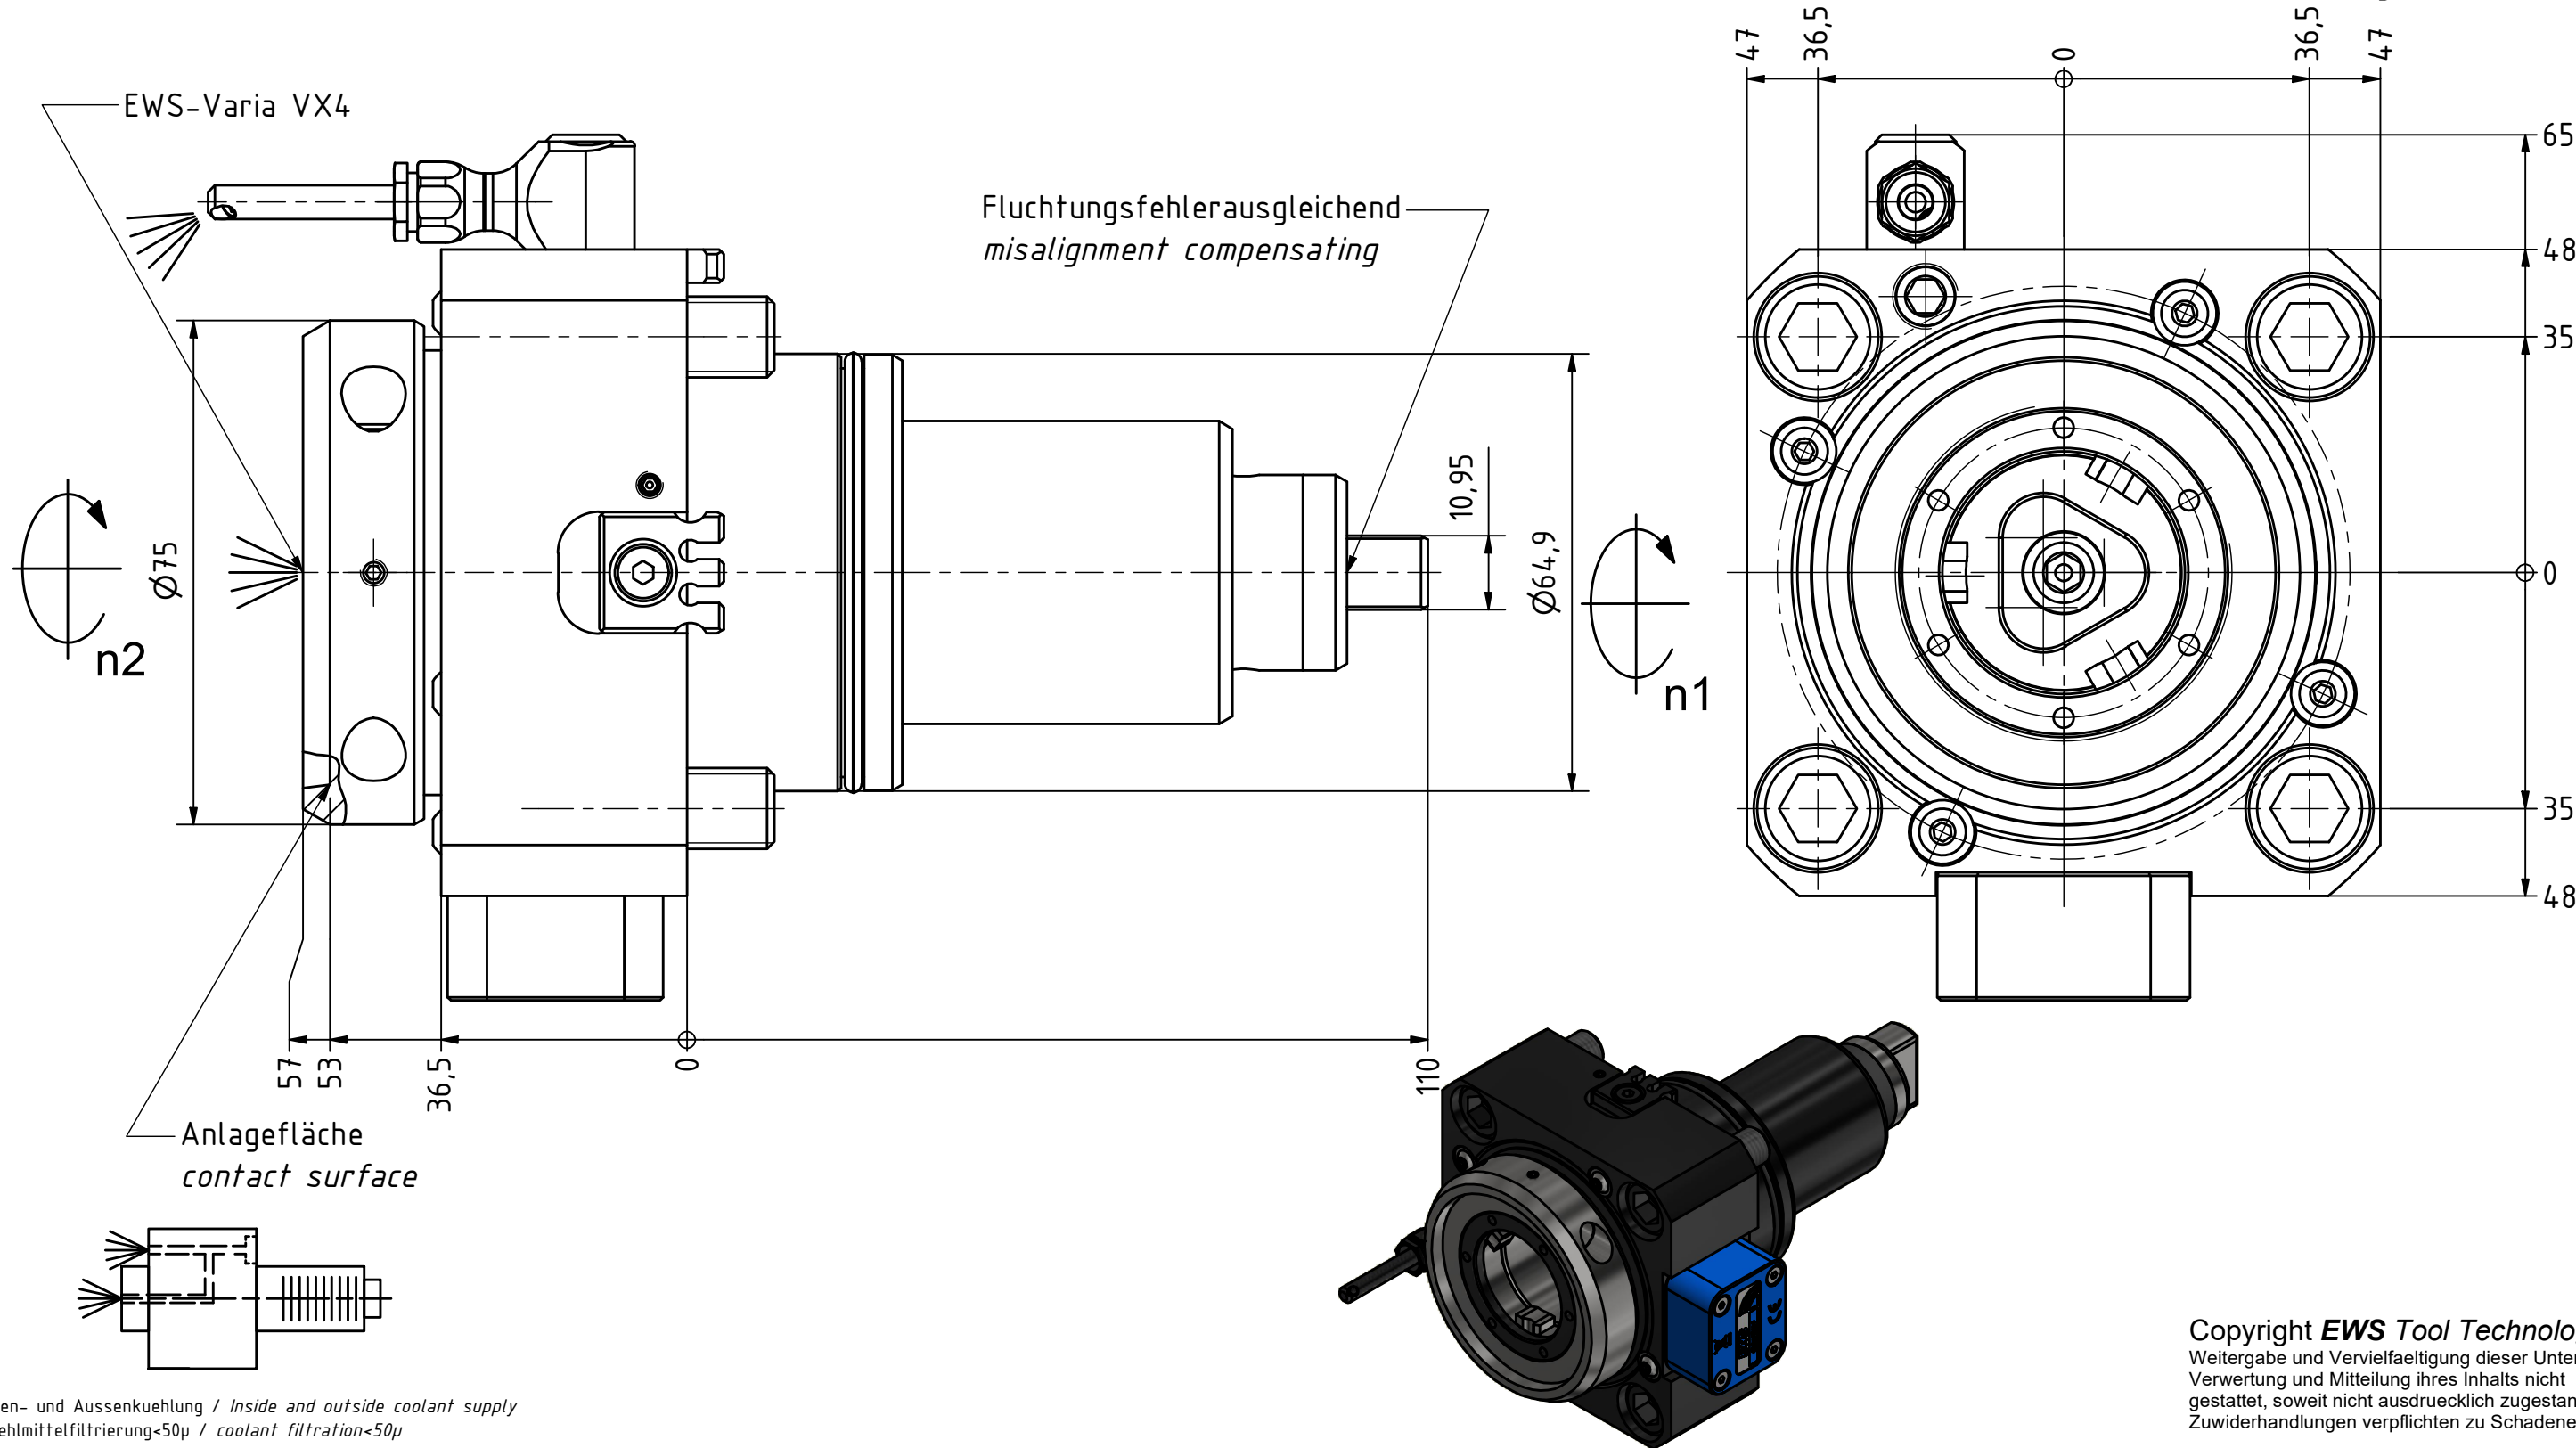

|                                                                                     |                                                                                                                                                                                                        |                                                                                 |                                                                                                                       |                                                                                                 |              |              |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------|--------------|
| Bemerkung - Note<br>Für Trockenlauf geeignet!<br>Use without coolant fluid allowed! | Technische Daten - technical data<br>Weight = 5.338 [kg]<br>Torque max. (M1/M2) = 80 / 80 [Nm]<br>Speed max. (n1/n2) = 6000 / 6000 [1/min]<br>Gear ratio (i)=n1:n2 = 1:1<br>Pressure (pmax) = 70 [bar] | Benennung - Title<br>Axial Bohr und Fräskopf<br>Axial drilling and milling head | <div> <div> EWS Weigle GmbH &amp; Co. KG<br/> Maybachstr. 1<br/> D-73066 Uhlingen<br/> www.ews-tools.de </div> </div> | Technische Aenderungen vorbehalten!<br>Subject to technical modifications!<br>IDENT: DEWS259110 | <div> </div> | <div> </div> |
|                                                                                     |                                                                                                                                                                                                        |                                                                                 |                                                                                                                       |                                                                                                 |              |              |
|                                                                                     |                                                                                                                                                                                                        |                                                                                 |                                                                                                                       |                                                                                                 |              |              |
|                                                                                     |                                                                                                                                                                                                        |                                                                                 | Nr. - No.<br>40.65VX4VL6FIKD-CC4                                                                                      | REV: -/A<br>MNR.<br>230475                                                                      |              |              |