




Ceramic Seal



Butterfly Seal




Polygon Joint





Coolant Management




Tech Details

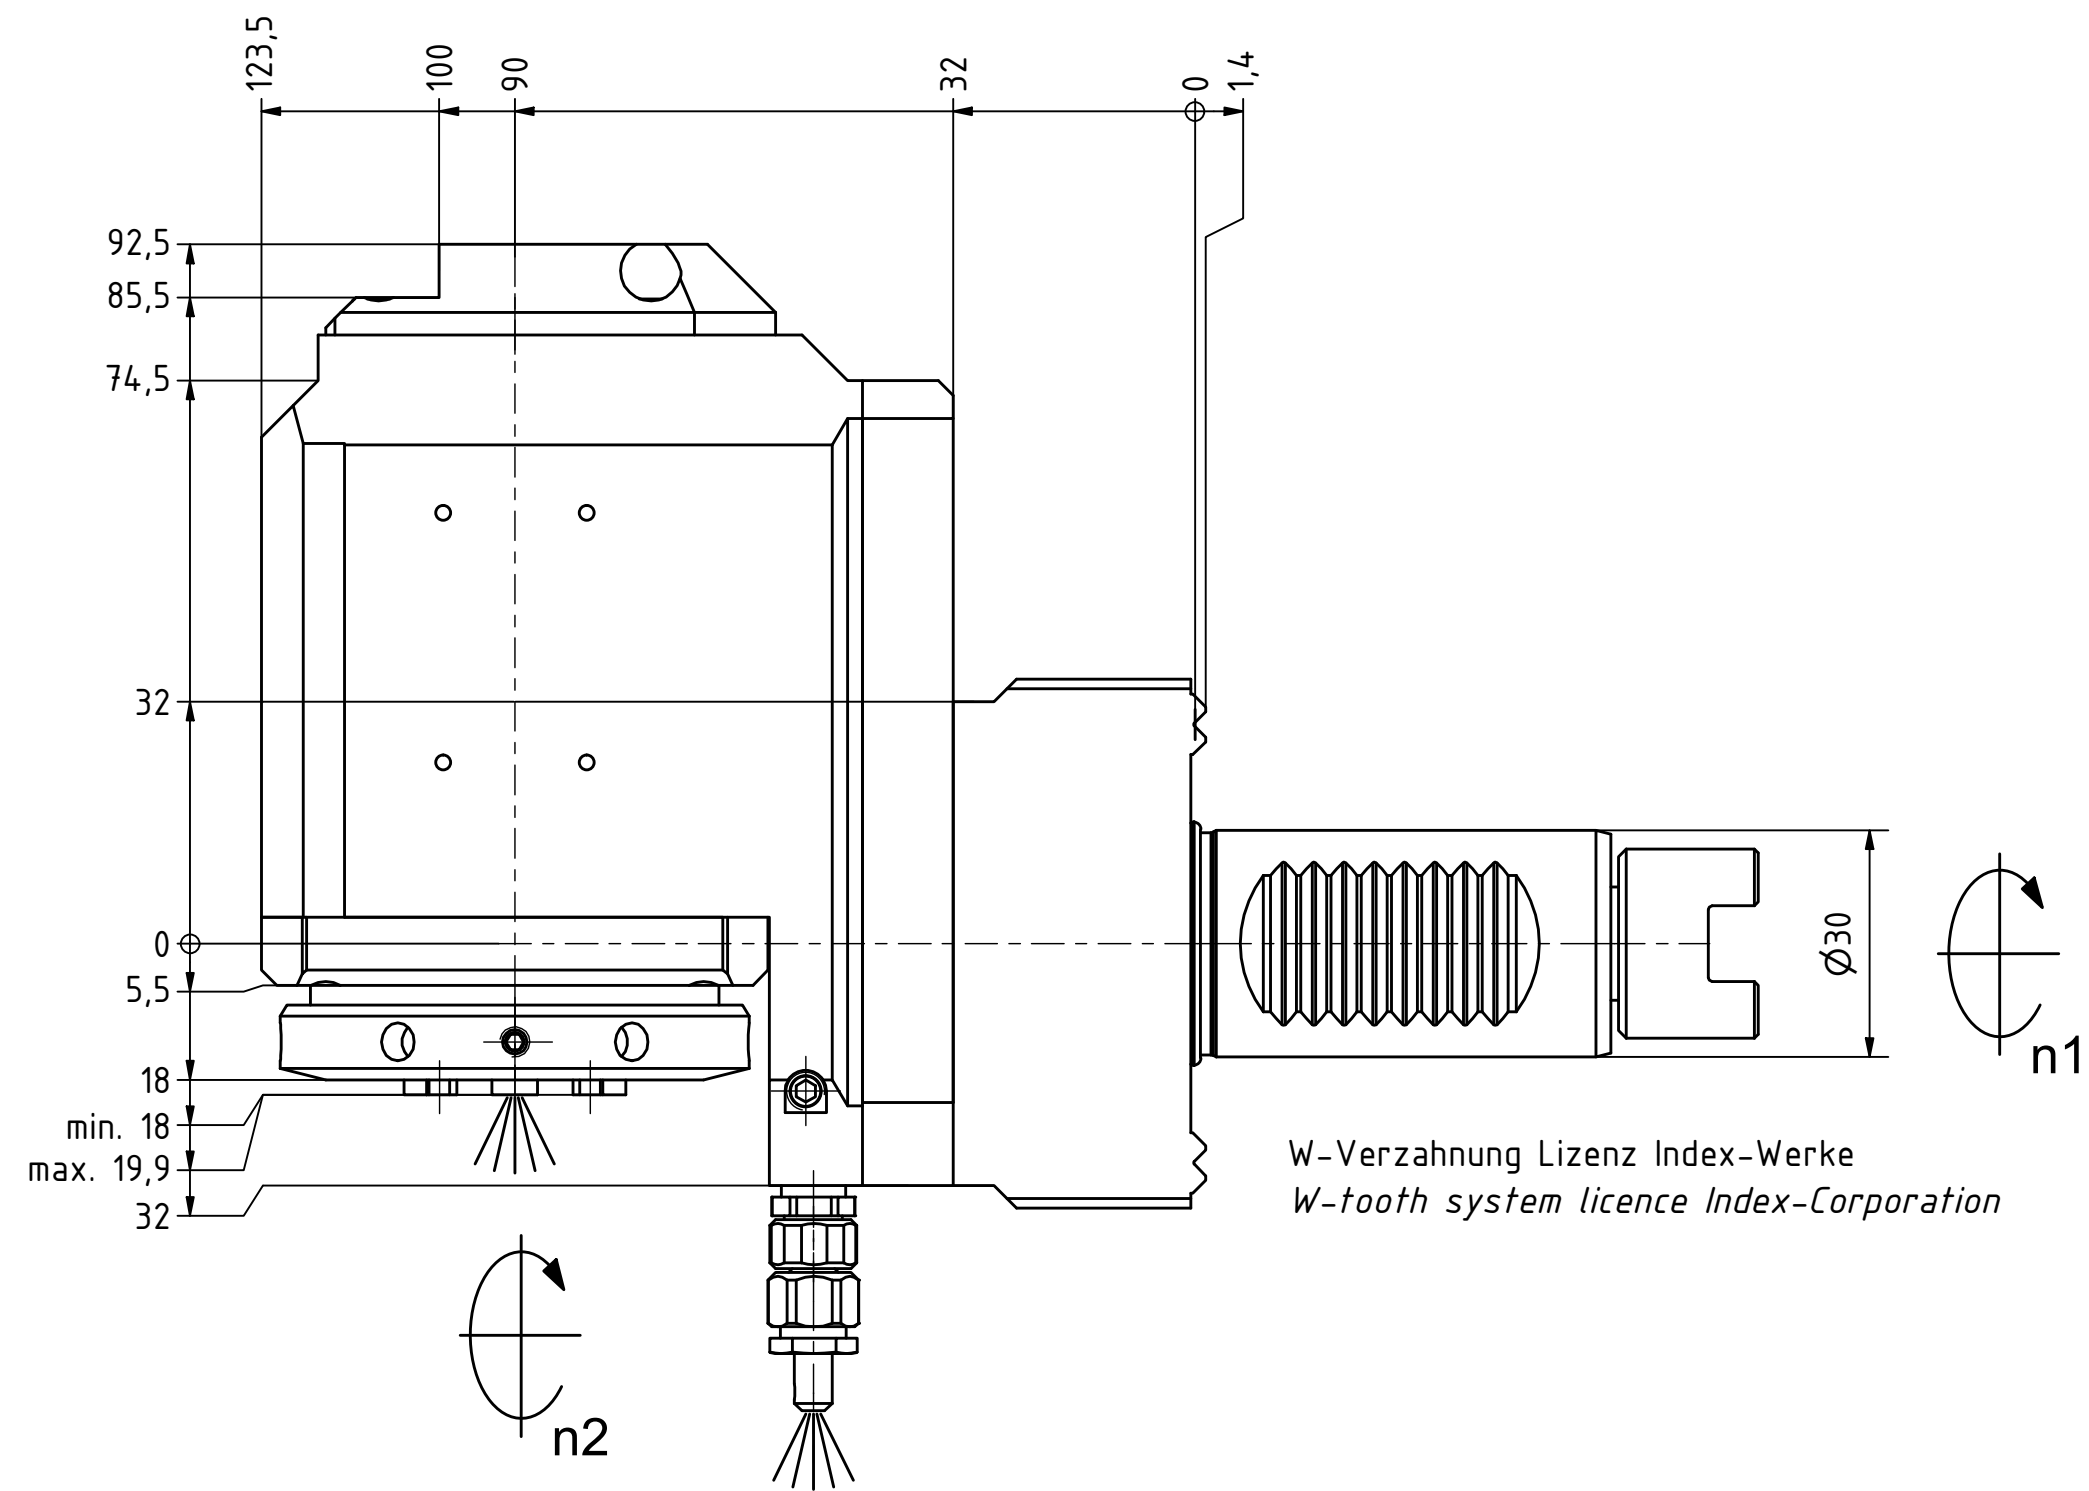



Spannzange / collet ER25 DIN6499
Spannbereich / clamping range: 1,0 - 16,0

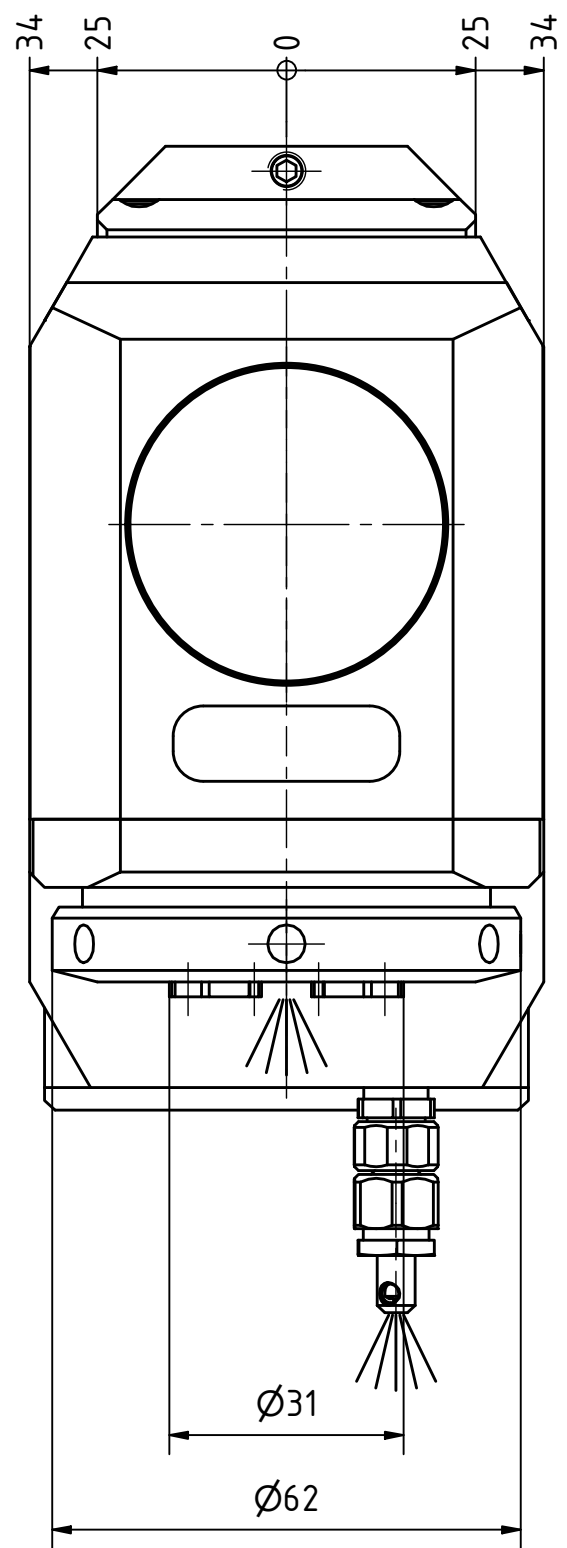


Innen- und Aussenkuehlung / Inside and outside coolant supply
Kuehlmittelfiltrierung+50µ / coolant filtration+50µ

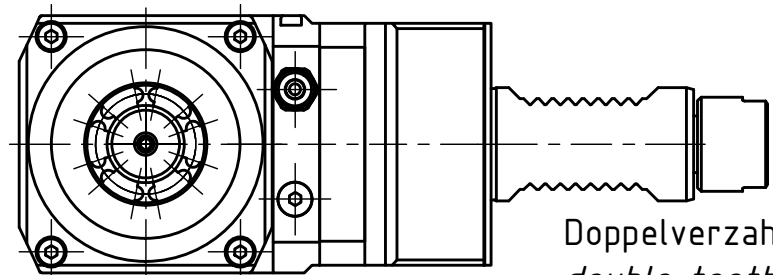

Doppelverzahnung Lizenz Traub
double tooth system licence Traub

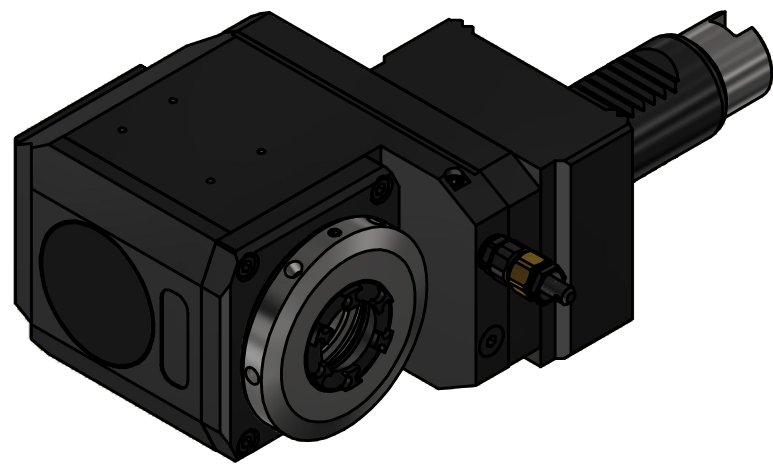

Spannzangenschlüssel für
innenliegende Mutter
Clamping wrench for
internal collet
225AX



Hakenschlüssel
mit Zapfen
Hook wrench
with fixed pin
DIN1810 B 58x62

Copyright **EWS Tool Technologies**
Weitergabe und Vervielfaeltigung dieser Unterlage,
Verwertung und Mitteilung ihres Inhalts nicht
gestattet, soweit nicht ausdrecklich zugestanden.
Zuwoerhandlungen verpflichten zu Schadenersatz.

Bemerkung - Note Für Trockenlauf geeignet! Use without coolant fluid allowed!	Technische Daten - technical data Weight = 5.070 [kg] Torque max. (M1/M2) = 32 / 32 [Nm] Speed max. (n1/n2) = 8000 / 8000 [1/min] Gear ratio (i)=n1:n2 = 1:1 Pressure (pmax) = 70 [bar]	Benennung - Title Radial Bohr und Fräskopf, zurückges Radial drill. and mill. head offset	 EWS Werkzeug GmbH & Co. KG Maybachstr. 1 D-73066 Ultingen www.ews-tools.de	Technische Aenderungen vorbehalten! Subject to technical modifications!		QR
			Nr. - No. 80.3025G300RLIKDWIM#01	IDENT: DEWS258420	REV: -/B	