


10-M Hub puller with cross beam, adjustable hooks, up to 150 mm clamping depth, max. 15 t tension force



APPLICATION IMAGE

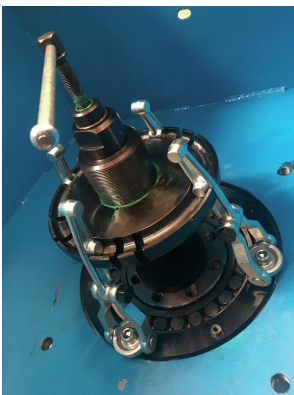

DESCRIPTION

The hub puller with cross beam is used to pull hubs on trucks. Up to six pulling jaws can be hooked onto the cross beam in different positions. The jaws can also be adjusted to two different lengths. This makes the puller universally applicable even with variable bolt circle diameters.

RANGE OF APPLICATION

For pulling off wheel hubs on trucks

BENEFIT

- Protection of wheel bolts through always planar-fitting nut recesses
- Length-adjustable and individually positionable pulling jaws as well as different sized partial discs guarantee universal application on commercial vehicles

OPERATION

- Attach pulling jaw to wheel hub using a screw connection
- Manually pull the spindle to apply pressure
- Move the hexagon drive (male) at the spindle tip with a ratchet or ring spanner until the wheel hub is loose

MASTER DATA

GTIN [EAN]	4021176862311
Country of origin	DE
Case material	Tool steel
Series	10-M
Net weight [kg]	16 kg
Package contents	1 piece
Packaging Act	PAP 21
Global sales capability given	Yes (REACH, RoHS, POP, PROP65, TSCA)

SPARE PARTS

- 10-5_Partial disc
- 10-6_Pulling jaw
- 10-M-20_Bushing for 10-M
- 633370_Two-sided spindle tip
- 633400_Mechanical spindle