

201-S 2-jaw tab puller for fan wheels with height-adjustable puller legs, up to 200 mm clamping range, 200 mm clamping depth



DESCRIPTION

The 2-jaw tab puller with oscillating and height-adjustable puller legs is used for pulling fan wheels and ship propellers in all common sizes for craft, workshop, and industry. Thanks to the particularly slim design, the puller legs grip through the two slots and grasp the flange of the fan. The oscillating puller legs adapt to every installation situation and are universally applicable due to the adjustability of the clamping depth. Additionally, the puller legs can be rotated 180° and used on both sides, offering different claw sizes depending on the space under the part to be pulled.

RANGE OF APPLICATION

For pulling off fan wheels


BENEFIT

- Adjustable puller legs for individual adaptation of the clamping depth thanks to multiple holes in the puller legs
- Oscillating puller legs offer a wide range of adjustment options
- Puller legs are 180° rotatable and usable on both sides
- Puller leg with different claw sizes for flexible working
- Safe placement of the spindle due to the rotatable spindle tip both on smooth surfaces and for centring (Switch Technology)
- Anti-slip device on the spindle head for safe working with a wrench
- Spindle outlet to protect the thread

OPERATION

- Set the puller leg externally on the part to be removed
- Swing the jaws under the component
- Manually pull the spindle to secure it
- Move the hexagon drive with a ratchet or a ring spanner until the component is loosened

APPLICATION IMAGE

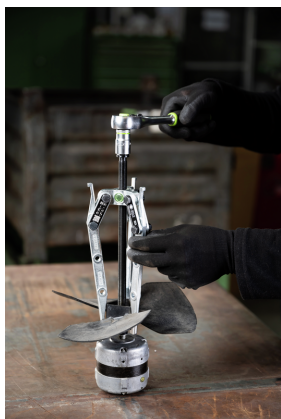

DETAIL IMAGE





MASTER DATA

GTIN [EAN]	4021176026911
Country of origin	DE
Case material	Tool steel
Series	201-S
Net weight [kg]	1,16 kg
Package contents	1 piece
Packaging Act	PAP 21
Global sales capability given	Yes (REACH, RoHS, POP, PROP65, TSCA)

SPARE PARTS


- 201-1-T_Cross Beam
- 201-S-P_2 pulling jaws (pair)
- 614240_Press spindle
- 614250_Mechanical spindle

2-jaw tab puller for fan wheels with height-adjustable puller legs, up to 200 mm clamping range, 200 mm clamping depth

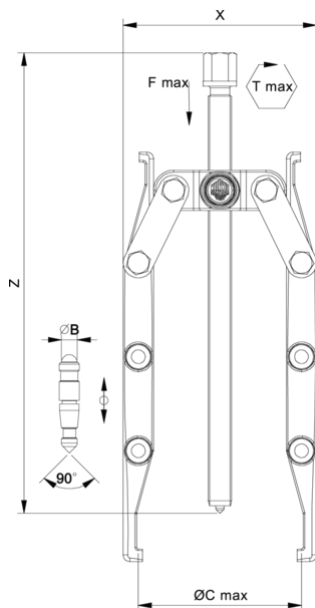


Abbreviation	Attribut	Wert
X	Total width [mm]	210 mm
Y	Total depth [mm]	30 mm
Z	Total height [mm]	275 mm
A	Clamping depth outside pull-off [mm]	200 mm
S1	Width across flats [mm]	17 mm
Cmin	Span outside pull-off (min.) [mm]	11 mm
Cmax	Span outside pull-off (max.) [mm]	200 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	6 mm
J	Hook base width (claw width J) [mm]	6 mm
O	Hook base depth usable (claw depth usable O) [mm]	3,5 mm
H	Total hook root depth (total claw depth H) [mm]	8,5 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	6 mm
Emin	Span inside pull-out (min.) [mm]	40 mm
Tmax	Max. torque [Nm]	30 Nm
Fmax	Max. tractive force [t]	1.5 t
Fmax	Max. tensile force [kN]	15 kN


Abbreviation	Attribut	Wert
X	Total width [mm]	210 mm
Y	Total depth [mm]	30 mm
Z	Total height [mm]	275 mm
A	Clamping depth outside pull-off [mm]	200 mm
S1	Width across flats [mm]	17 mm
Cmin	Span outside pull-off (min.) [mm]	11 mm
Cmax	Span outside pull-off (max.) [mm]	200 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	6 mm
J	Hook base width (claw width J) [mm]	6 mm
O	Hook base depth usable (claw depth usable O) [mm]	3,5 mm
H	Total hook root depth (total claw depth H) [mm]	8,5 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	6 mm
Emin	Span inside pull-out (min.) [mm]	40 mm
Tmax	Max. torque [Nm]	30 Nm
Fmax	Max. tractive force [t]	1.5 t
Fmax	Max. tensile force [kN]	15 kN

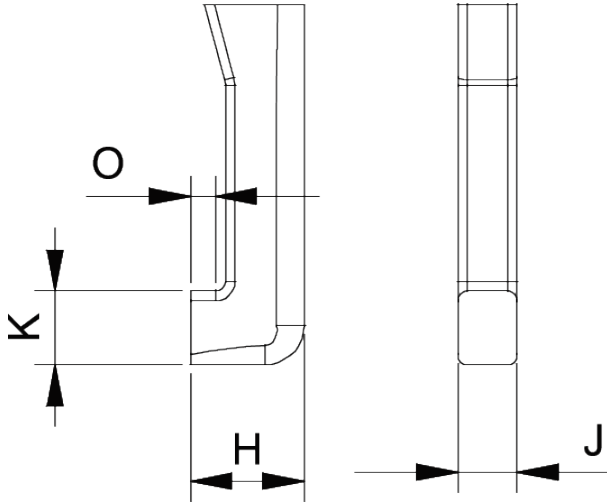


Abbreviation	Attribut	Wert
X	Total width [mm]	210 mm
Y	Total depth [mm]	30 mm
Z	Total height [mm]	275 mm
A	Clamping depth outside pull-off [mm]	200 mm
S1	Width across flats [mm]	17 mm
Cmin	Span outside pull-off (min.) [mm]	11 mm
Cmax	Span outside pull-off (max.) [mm]	200 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	6 mm
J	Hook base width (claw width J) [mm]	6 mm
O	Hook base depth usable (claw depth usable O) [mm]	3,5 mm
H	Total hook root depth (total claw depth H) [mm]	8,5 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	6 mm
Emin	Span inside pull-out (min.) [mm]	40 mm
Tmax	Max. torque [Nm]	30 Nm
Fmax	Max. tractive force [t]	1.5 t
Fmax	Max. tensile force [kN]	15 kN

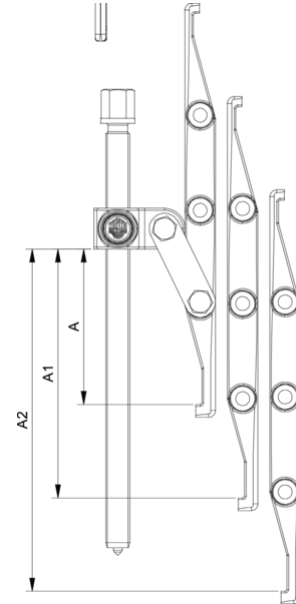

Abbreviation	Attribut	Wert
X	Total width [mm]	210 mm
Y	Total depth [mm]	30 mm
Z	Total height [mm]	275 mm
A	Clamping depth outside pull-off [mm]	200 mm
S1	Width across flats [mm]	17 mm
Cmin	Span outside pull-off (min.) [mm]	11 mm
Cmax	Span outside pull-off (max.) [mm]	200 mm
K	Hook root thickness at the tip (claw thickness K) [mm]	6 mm
J	Hook base width (claw width J) [mm]	6 mm
O	Hook base depth usable (claw depth usable O) [mm]	3,5 mm
H	Total hook root depth (total claw depth H) [mm]	8,5 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	6 mm
Emin	Span inside pull-out (min.) [mm]	40 mm
Tmax	Max. torque [Nm]	30 Nm
Fmax	Max. tractive force [t]	1.5 t
Fmax	Max. tensile force [kN]	15 kN

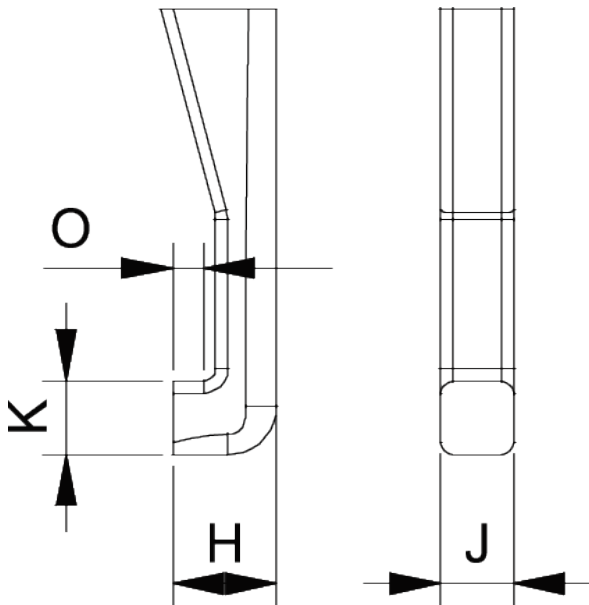

Abbreviation	Attribut	Wert
X	Total width [mm]	210 mm
Y	Total depth [mm]	30 mm
Z	Total height [mm]	275 mm
A	Clamping depth outside pull-off [mm]	200 mm
S1	Width across flats [mm]	17 mm
Cmin	Span outside pull-off (min.) [mm]	11 mm
Cmax	Span outside pull-off (max.) [mm]	200 mm

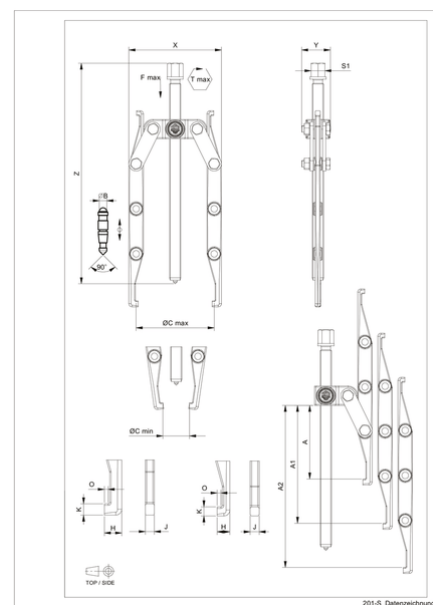

Abbreviation	Attribut	Wert
X	Total width [mm]	210 mm
Y	Total depth [mm]	30 mm
Z	Total height [mm]	275 mm
A	Clamping depth outside pull-off [mm]	200 mm
S1	Width across flats [mm]	17 mm
Cmin	Span outside pull-off (min.) [mm]	11 mm
Cmax	Span outside pull-off (max.) [mm]	200 mm

K	Hook root thickness at the tip (claw thickness K) [mm]	6 mm
J	Hook base width (claw width J) [mm]	6 mm
O	Hook base depth usable (claw depth usable O) [mm]	3,5 mm
H	Total hook root depth (total claw depth H) [mm]	8,5 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	6 mm
Emin	Span inside pull-out (min.) [mm]	40 mm
Tmax	Max. torque [Nm]	30 Nm
Fmax	Max. tractive force [t]	1.5 t
Fmax	Max. tensile force [kN]	15 kN

K	Hook root thickness at the tip (claw thickness K) [mm]	6 mm
J	Hook base width (claw width J) [mm]	6 mm
O	Hook base depth usable (claw depth usable O) [mm]	3,5 mm
H	Total hook root depth (total claw depth H) [mm]	8,5 mm
L	Total claw thickness (L+1mm) (claw distance to base surface) [mm]	6 mm
Emin	Span inside pull-out (min.) [mm]	40 mm
Tmax	Max. torque [Nm]	30 Nm
Fmax	Max. tractive force [t]	1.5 t
Fmax	Max. tensile force [kN]	15 kN